

Replacing the on/off switch


Start by removing the screws under the handles.




After removing the control panel, you can open it up and remove the screws located on the DRO.




Once you remove the screws flip over the DRO and remove the wires for the on/off switch. These are the red, blue, and yellow wires.

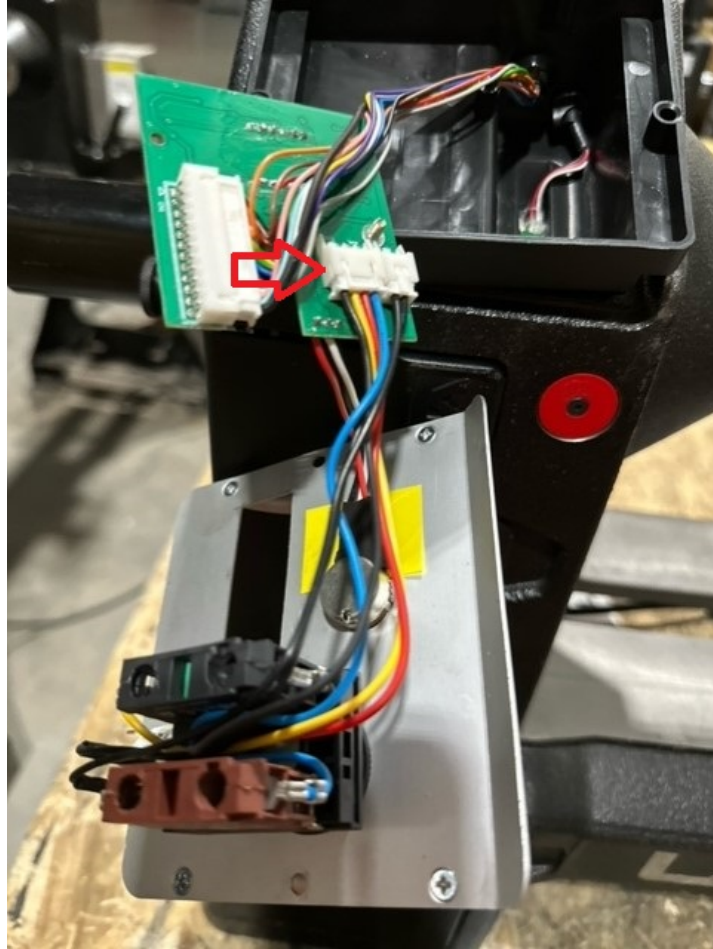


Once you have removed the wire from the DRO you can remove the switch from the control panel.

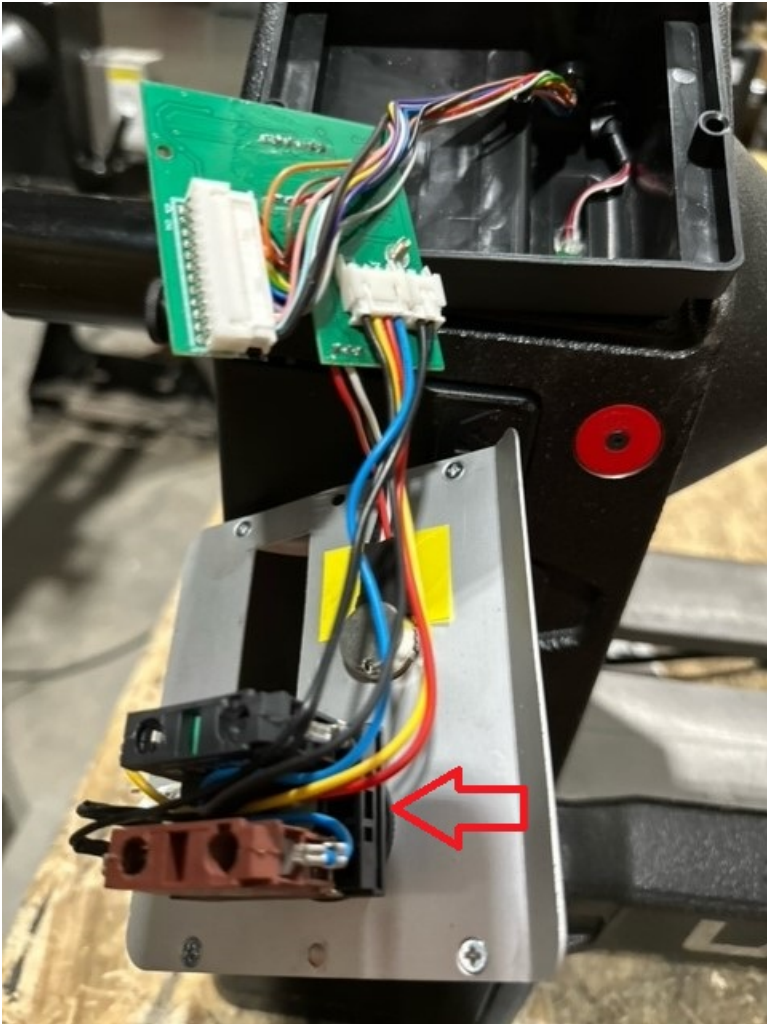

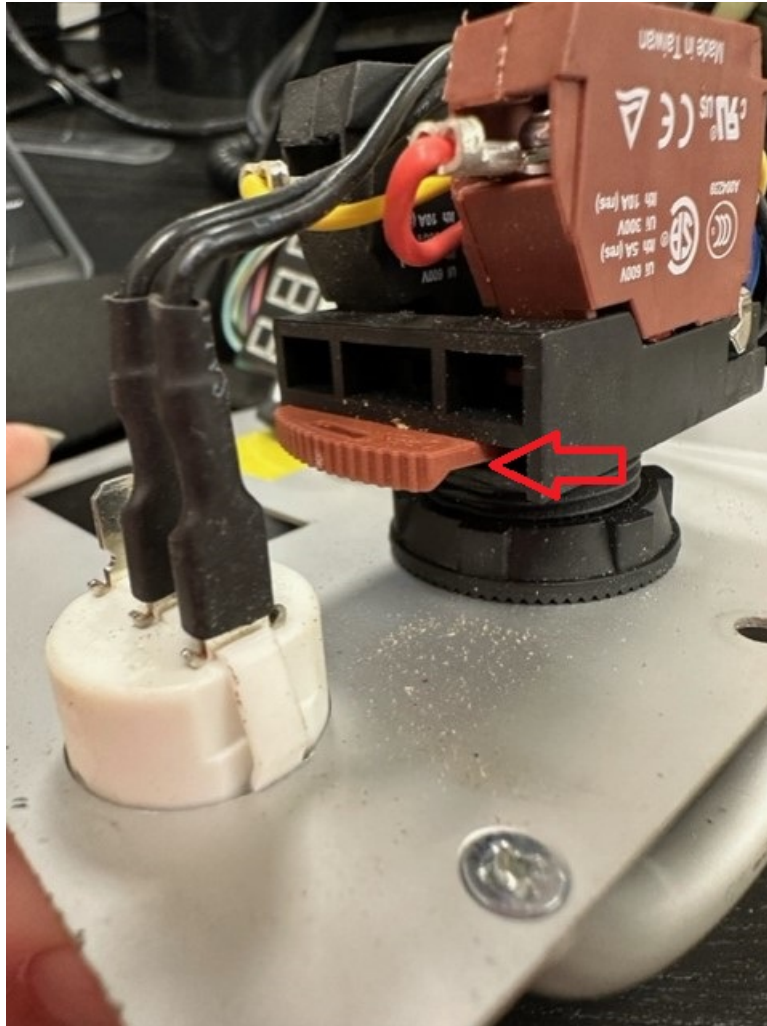

Push this switch to the other side and pull it off.

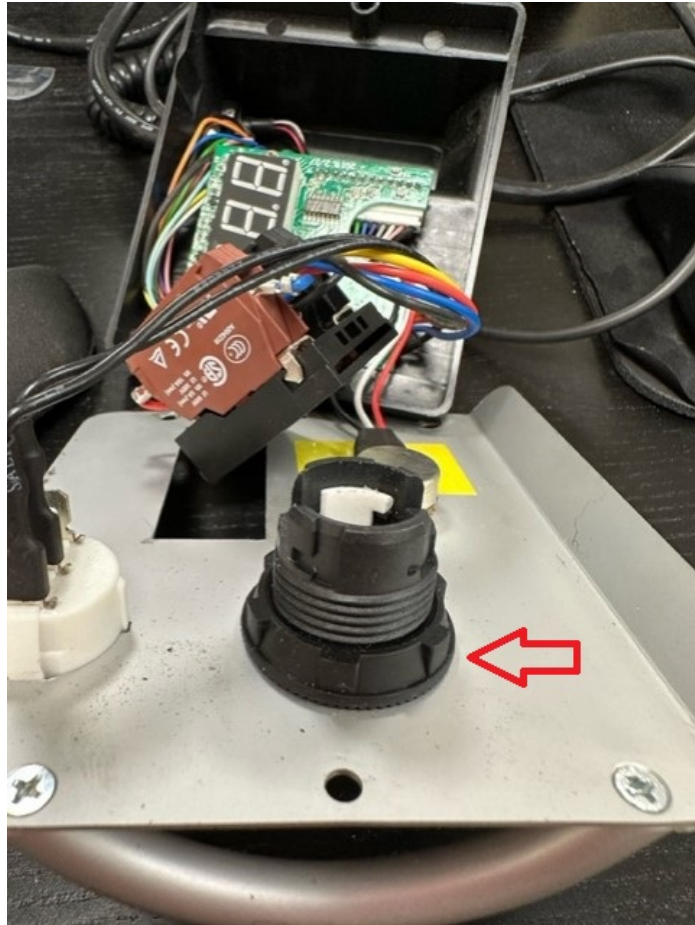

Twist the black ring off. You may need to use some pliers to loosen.

Once the switch and the wires are removed you can now replace it with your new on/off switch.